


`bpmnr/nr_rangauss.c`

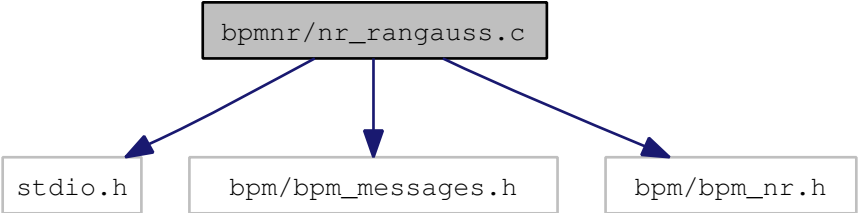

```
graph TD; A[bpmnr/nr_rangauss.c] --> B[stdio.h]; A --> C[bpm/bpm_messages.h]; A --> D[bpm/bpm_nr.h];
```

The diagram illustrates the dependencies of the source file `bpmnr/nr_rangauss.c`. It is represented by a gray rectangular box at the top. Three dark blue arrows originate from the bottom of this box and point to three separate white rectangular boxes below it. The first arrow points to the left to a box containing `stdio.h`. The second arrow points straight down to a box containing `bpm/bpm_messages.h`. The third arrow points to the right to a box containing `bpm/bpm_nr.h`.

`stdio.h`

`bpm/bpm_messages.h`

`bpm/bpm_nr.h`